



aerospace
climate control
electromechanical
filtration
fluid & gas handling
hydraulics
pneumatics
process control
sealing & shielding



东莞迈诺自动还设备有限公司

VB Hydraulic Clamp


Catalogue PDE2636TCUK September 2023



ENGINEERING YOUR SUCCESS.

VB Hydraulic Clamp

Clamp cylinders are single acting pneumatic cylinders with built-in oleo-pneumatic intensifiers.
They can be used to solve most clamping, tightening etc problems.




- Compact size for large forces (up to 2100 daN depending on the model and air pressure).
- Operated using a compressed air supply (no special installation required)
- Easy adjustment thanks to a fully threaded body
- Simple and rapid installation.




东莞迈诺自动还设备有限公司


Clamping examples

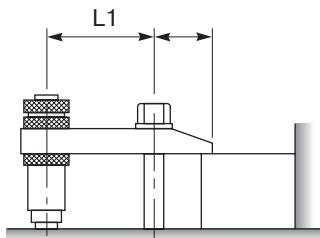


Clamping with intensified force
 $L_1/L_2 < 2$

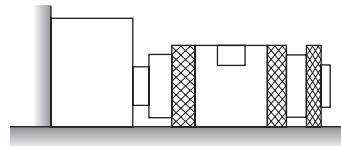

Horizontal clamping

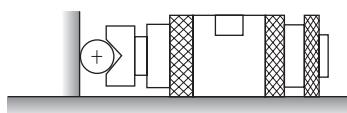

Clamping of cylindrical component
using V groove clamp end

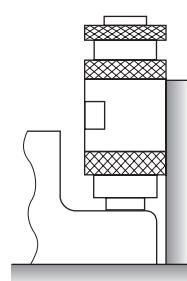

Vertical clamping

VB Hydraulic Clamp

Ordering references

Order code	Max stroke (mm)	Ø external	Weight - g (lbs)
VB363C	3	36	570 (1.3)
VB366C	6	36	640 (1.4)
VB369C	9	36	890 (2.0)
VB483C	3	48	1050 (2.3)
VB486C	6	48	1350 (3.0)
VB489C	9	48	1152 (2.5)
VB4812C	12	48	1840 (4.0)
VBH483C	3	48	1240 (2.7)
VB606C	6	60	2360 (5.2)
VB609C	9	60	3120 (6.9)
VB6012C	12	60	3810 (8.4)
VBH603C	3	60	2360 (5.2)
VBH606C	6	60	3700 (8.1)

Seal kits

东莞迈诺自动还设备有限公司

Seal kit for	VB Ø 36	VB Ø 48	VBH Ø 48	VB Ø 60	VBH Ø 60
Order Code	JJVB36	JJVB48	JJVBH48	JJVB60	JJVBH60

Oil container suitable for all types of cylinder (250 ml capacity)

Model No.: **BH680VB**

Technical data

Material specification

Body	Nickel plated steel
Piston rod	Hardened steel
Locking rings	Zinc plated steel
End cap	Zinc plated steel
Seals	Nitrile

Operation

Temperature range	+5°C to +50°C (41°F to 122°F)
Storage temperature	-20°C to +60°C (-4°F to 140°F)
Pressure range	1 to 9 bar (15 to 130 psi) (except VBH603 and VBH606 : 7 bar (101psi max.)
Air condition	Filtered air 40µ lubricated or non lubricated

Maintenance

For all operations see our maintenance instructions
All safety requirements must be observed.

VB Hydraulic Clamp

Technical data

Cylinder force

Note: The clamping time is given from the moment the clamp cylinder is pressurised to the time at when 90% of the clamping force is obtained, the cylinder completing a full stroke.

The release time is given from the moment the clamp cylinder starts to exhaust until the rod is fully retracted.


When the cylinder remains pressurised for more than 10 min. add 0,20 sec. to the release time.

These average times are given for information only. They will vary depending on the application and the cylinder inlet and exhaust circuits.

Order code	Max. stroke (mm)	Force at 6 bar daN (lbs)	Clamping time (s)	Release time (s)
VB363C	3	240 (540)	0,10	1,00
VB366C	6	240 (540)	0,15	1,30
VB369C	9	240 (540)	0,20	1,50
VB483C	3	530 (1190)	0,30	1,30
VB486C	6	530 (1190)	0,40	1,60
VB489C	9	530 (1190)	0,50	1,90
VB4812C	12	530 (1190)	0,60	2,20
VBH483C	3	1060 (2380)	0,50	0,70
VB606C	6	1140 (2560)	0,50	1,90
VB609C	9	1140 (2560)	0,60	2,30
VB6012C	12	1140 (2560)	0,70	2,50
VBH603C	3	1800 (4000)	0,50	0,70
VBH606C	6	1800 (4000)	0,60	1,05

Principle of operation

东莞迈诺自动还设备有限公司

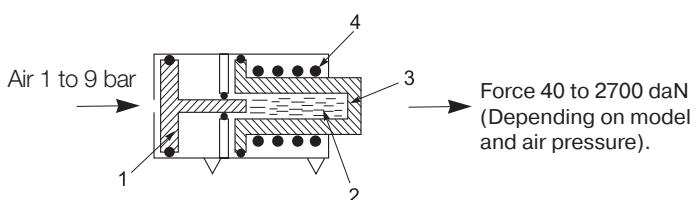

Air pressure applied to the pneumatic piston (1) causes the plunger to displace the enclosed oil in the hydraulic section of the cylinder (2). A high-pressure stroke results at the hydraulic piston (3) due to the differential areas of the two pistons.

The return of pistons (1) and (3) is caused by a return spring (4) when the air pressure is removed.

VB Hydraulic Clamp

Technical data


Working conditions

Clamp cylinders must be installed so that the force is directed along the axis. (Take care that the exhaust ports are not blocked and that they are protected from swarf, cutting oil, dust, etc.)

Do not operate the cylinder at no-load. The clamp cylinder must always be operated in conjunction with a clamping fixture (clamp or block) to limit the stroke to within the maximum length specified in the ordering reference table.

We recommend an effective stroke equal to the max. length minus 1mm.

Please contact us for applications requiring force during part of the stroke (marking, crimping, punching, etc.) and high speeds.

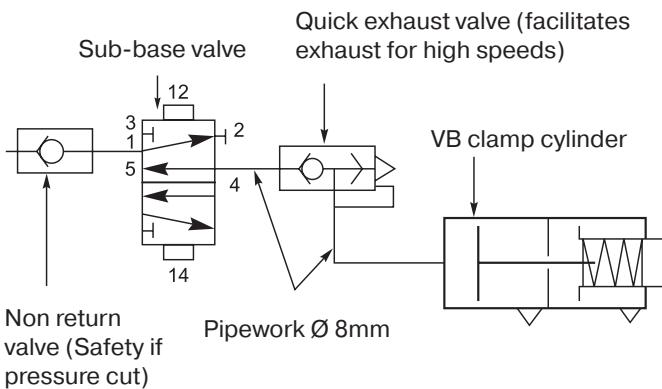


Pneumatic Circuit

For correct use of clamp cylinders, we recommend applications of the circuit diagram opposite:

东莞迈诺自动还设备有限公司

Dimensions (mm)

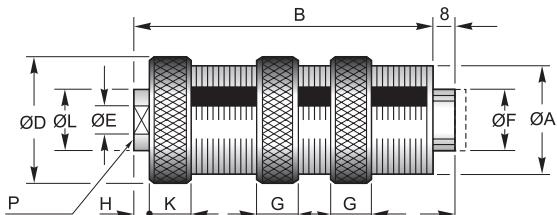

Order code	ØA	B	ØD	ØE	ØF	G	H	K	ØL	P
VB363C	M36 x 1,5	98,0	42	G1/8	22	12	4	13	22	17
VB366C	M36 x 1,5	127,5	42	G1/8	22	12	4	13	22	17
VB369C	M36 x 1,5	185,0	42	G1/8	22	12	4	13	22	17
VB483C	M48 x 1,5	111,0	56	G1/8	32	12	4	13	22	17
VBH483C	M48 x 1,5	148,0	56	G1/8	32	12	4	13	22	17
VB486C	M48 x 1,5	148,0	56	G1/8	32	12	4	13	22	17
VB489C	M48 x 1,5	188,0	56	G1/8	32	12	4	13	22	17
VB4812C	M48 x 1,5	234,0	56	G1/8	32	12	4	13	22	17
VBH603C	M60 x 2	175,0	70	G1/4	40	14	5	17	25	22
VB606C	M60 x 2	175,0	70	G1/4	40	14	5	17	25	22
VBH606C	M60 x 2	290,0	70	G1/4	40	14	5	17	25	22
VB609C	M60 x 2	249,0	70	G1/4	40	14	5	17	25	22
VB6012C	M60 x 2	314,0	70	G1/4	40	14	5	17	25	22